

TESAB



1125T

HIGH PRODUCTION IMPACT CRUSHER

The 1125T is in a class of its own, bringing the productivity of an 1125mm (44.3") impactor to a compact footprint for maximum power and maneuverability. The crusher's design has ease of access in mind, with an excellent layout for operation, maintenance and service. Advanced clutch technology delivers reduced fuel consumption, and less maintenance while increasing safety and productivity.

With its simplified controls and efficient hydraulics, the 1125T heavy duty track mounted crusher is sure to make an impact across a variety of materials and applications.


FEATURES & BENEFITS

- 1050mm (41.3") diameter x 1125mm (44.3") wide Impactor
- 375Hp (280kW) engine
- Crawler Tracks
- I-beam plate fabricated chassis construction
- Open chassis design for ease of maintenance
- Integrated hydraulic folding stockpiling conveyors
- Apron adjustment to suit either Secondary or Primary crushing
- Fast setup time

IMPACT CRUSHER

One piece vibrating grizzly feeder with 3.8 yd³ (5.0m³) volume capacity.

A 41.3" x 44.3" (1050mm x 1125mm), four bar impactor rotor with a 45.3" x 31.5" (1150mm x 800mm) feed opening.

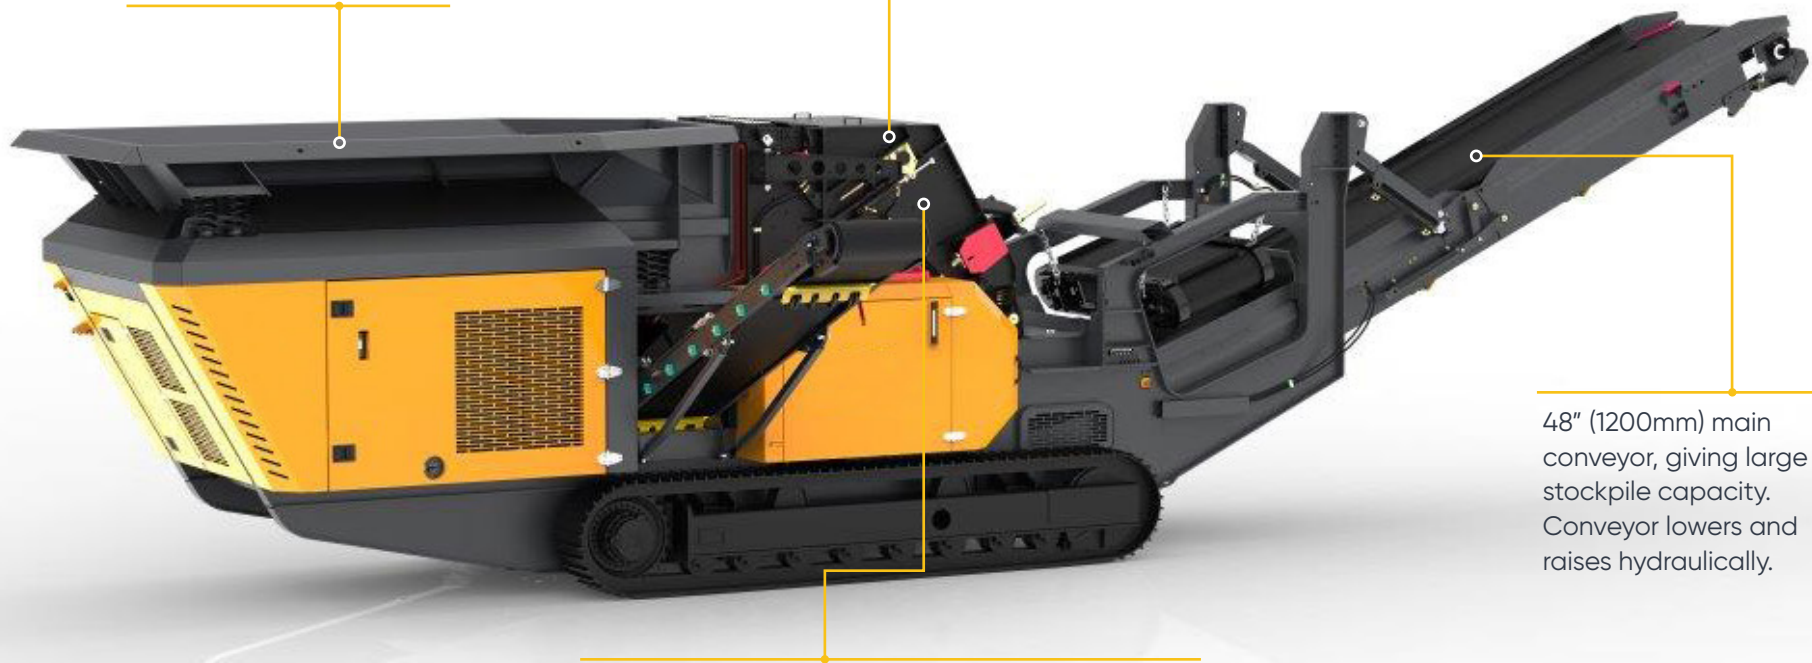

48" (1200mm) main conveyor, giving large stockpile capacity. Conveyor lowers and raises hydraulically.

Direct drive crusher rotor via clutch which boasts maximum power transmission with a low fuel cost.

PERFORMANCE SPECIFICATION

* Depending on application

Engine	Weight - w/ magnet & side conveyor	Impact Rotor	Hopper Volume	Production Rate*
375 Hp (280 kW)	76,720 lb (34,800kg)	41.3" diameter x 44.3" wide	5.0m ³ (3.8yd ³)	up to 350 TPH

DIMENSION SPECIFICATION*

* Depending on material density and set-up

TRANSPORT DIMENSIONS			CONVEYOR STOCKPILE HEIGHT	
Height	Width	Length	Main	Side
10' 6" (3.2m)	8' 8" (2.65m)	36' 7" (11.16m)	48" (1200mm)	9' 1" (2.76m)